
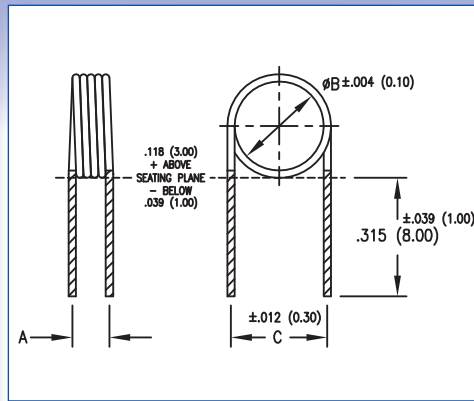


Dimensions in inches (mm)

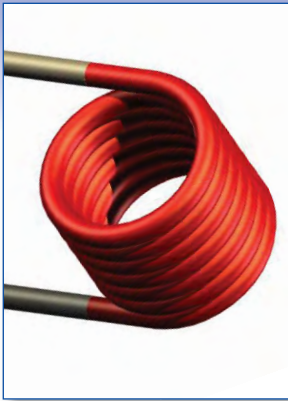

How to order code

555 - 20XX - XX - 00 - 00

Basic Part No. _____ Inductance Code _____

Basic Part No.	Turns	Inductance	Q Min.	Test Frequency (MHz)	DCR (typical)	SRF Min.	Dimension A	Dimension B	Dimension C	
555-2030	-03	3½	40.0 nH ±7%	150	100	4.6 mΩ	2.1 GHz	.087 (2.20)	.118 (3.00)	.146 (3.70)
	-04	4½	55.0 nH ±7%	150	100	5.7 mΩ	2.0 GHz	.110 (2.80)	.118 (3.00)	.146 (3.70)
	-05	5½	70.0 nH ±7%	140	100	6.9 mΩ	1.9 GHz	.130 (3.30)	.118 (3.00)	.146 (3.70)
	-06	6½	90.0 nH ±7%	140	100	7.7 mΩ	1.8 GHz	.154 (3.90)	.118 (3.00)	.146 (3.70)
	-07	7½	105 nH ±5%	130	100	9.0 mΩ	1.7 GHz	.174 (4.40)	.118 (3.00)	.146 (3.70)
	-08	8½	120 nH ±5%	130	100	10.1 mΩ	1.6 GHz	.197 (5.00)	.118 (3.00)	.146 (3.70)
	-09	9½	140 nH ±5%	130	100	11.0 mΩ	1.5 GHz	.217 (5.50)	.118 (3.00)	.146 (3.70)
	-10	10½	160 nH ±5%	130	100	11.9 mΩ	1.5 GHz	.240 (6.10)	.118 (3.00)	.146 (3.70)
	-11	11½	175 nH ±5%	120	100	13.0 mΩ	1.4 GHz	.260 (6.60)	.118 (3.00)	.146 (3.70)
	-12	12½	195 nH ±5%	120	100	14.0 mΩ	1.4 GHz	.283 (7.20)	.118 (3.00)	.146 (3.70)
	-13	13½	210 nH ±5%	120	100	15.2 mΩ	1.3 GHz	.303 (7.70)	.118 (3.00)	.146 (3.70)
	-14	14½	230 nH ±5%	120	100	16.3 mΩ	1.3 GHz	.327 (8.30)	.118 (3.00)	.146 (3.70)
	-15	15½	250 nH ±5%	110	100	17.4 mΩ	1.2 GHz	.346 (8.80)	.118 (3.00)	.146 (3.70)
	-16	16½	265 nH ±5%	110	100	18.5 mΩ	1.2 GHz	.370 (9.40)	.118 (3.00)	.146 (3.70)
	-17	17½	290 nH ±5%	110	100	19.5 mΩ	1.1 GHz	.390 (9.90)	.118 (3.00)	.146 (3.70)
	-18	18½	305 nH ±3%	100	100	20.4 mΩ	1.1 GHz	.413 (10.5)	.118 (3.00)	.146 (3.70)
-19	19½	325 nH ±3%	100	100	21.5 mΩ	1.0 GHz	.433 (11.0)	.118 (3.00)	.146 (3.70)	
-20	20½	345 nH ±3%	90	100	22.6 mΩ	1.0 GHz	.457 (11.6)	.118 (3.00)	.146 (3.70)	
555-2060	-03	3½	100 nH ±5%	140	50.0	8.0 mΩ	800 MHz	.087 (2.20)	.236 (6.00)	.267 (6.70)
	-04	4½	145 nH ±5%	140	50.0	10.3 mΩ	675 MHz	.110 (2.80)	.236 (6.00)	.267 (6.70)
	-05	5½	195 nH ±5%	140	50.0	11.8 mΩ	575 MHz	.130 (3.30)	.236 (6.00)	.267 (6.70)
	-06	6½	250 nH ±5%	130	50.0	13.6 mΩ	525 MHz	.154 (3.90)	.236 (6.00)	.267 (6.70)
	-07	7½	305 nH ±5%	130	50.0	15.6 mΩ	478 MHz	.174 (4.40)	.236 (6.00)	.267 (6.70)
	-08	8½	360 nH ±5%	130	50.0	17.0 mΩ	425 MHz	.197 (5.00)	.236 (6.00)	.267 (6.70)
	-09	9½	425 nH ±5%	120	50.0	18.9 mΩ	400 MHz	.217 (5.50)	.236 (6.00)	.267 (6.70)
	-10	10½	485 nH ±5%	120	50.0	20.3 mΩ	375 MHz	.240 (6.10)	.236 (6.00)	.267 (6.70)
	-11	11½	550 nH ±5%	120	50.0	22.2 mΩ	350 MHz	.260 (6.60)	.236 (6.00)	.267 (6.70)
	-12	12½	610 nH ±5%	110	50.0	24.1 mΩ	350 MHz	.283 (7.20)	.236 (6.00)	.267 (6.70)
	-13	13½	675 nH ±5%	110	50.0	25.8 mΩ	325 MHz	.303 (7.70)	.236 (6.00)	.267 (6.70)
	-14	14½	740 nH ±5%	110	50.0	28.0 mΩ	325 MHz	.327 (8.30)	.236 (6.00)	.267 (6.70)
	-15	15½	810 nH ±5%	100	50.0	29.7 mΩ	300 MHz	.346 (8.80)	.236 (6.00)	.267 (6.70)
	-16	16½	870 nH ±5%	100	50.0	31.8 mΩ	300 MHz	.370 (9.40)	.236 (6.00)	.267 (6.70)
	-17	17½	940 nH ±5%	100	50.0	33.3 mΩ	300 MHz	.390 (9.90)	.236 (6.00)	.267 (6.70)
	-18	18½	1000 nH ±5%	90	50.0	35.2 mΩ	275 MHz	.413 (10.5)	.236 (6.00)	.267 (6.70)
-19	19½	1065 nH ±5%	90	50.0	37.0 mΩ	275 MHz	.433 (11.0)	.236 (6.00)	.267 (6.70)	
-20	20½	1130 nH ±5%	80	50.0	38.7 mΩ	250 MHz	.457 (11.6)	.236 (6.00)	.267 (6.70)	

Devices are RoHS compliant
 Typical I_{DC} 555-2030 series 4Amps.
 555-2060 series 2.5Amps
 Wire 0.5mm Ø class 200
 Leads tinned 96/3.5/0.5 tin/silver/copper