


**450-3390 Socket for Patch Lead Ends, Stackable,
 .025 (0,64) Pin and Socket
 (supplied with loose heat shrink insulator)
 (socket supplied without insulator, 450-3078)**

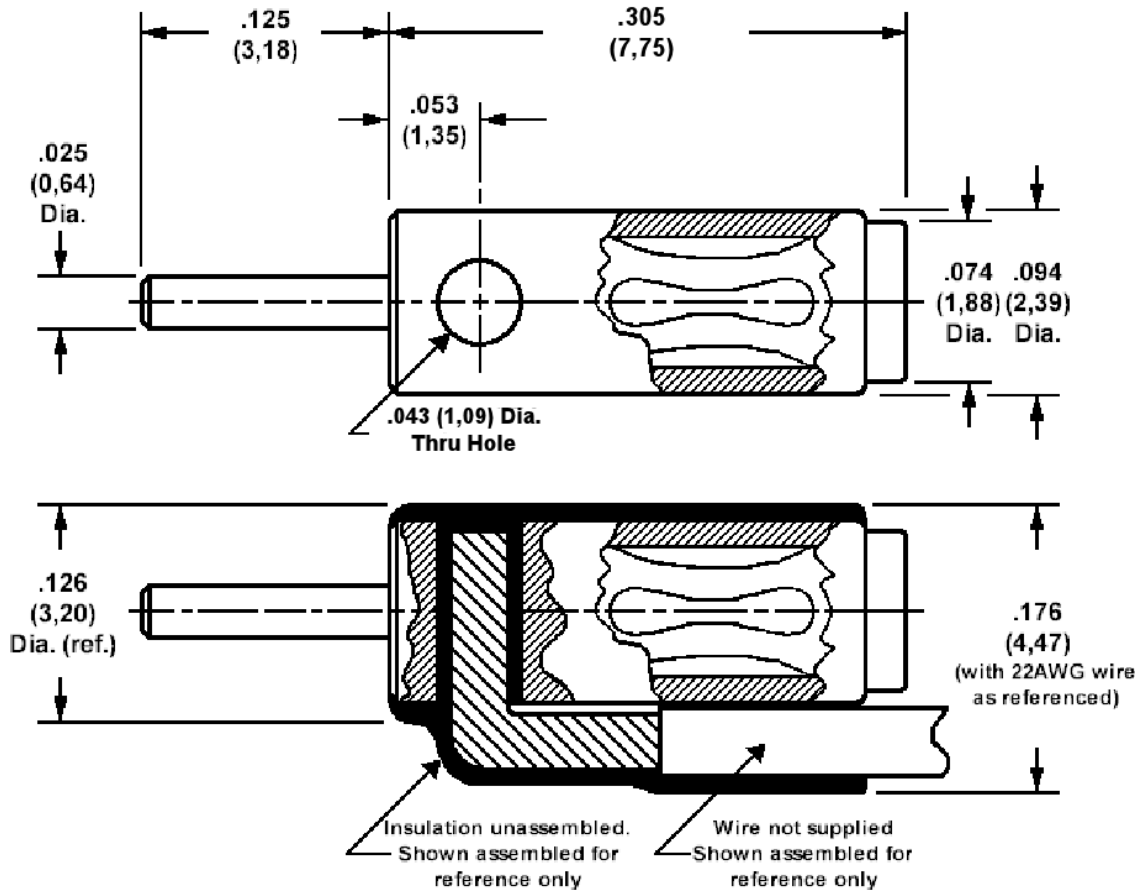

Min hole depth .145 (3,68)

How to order code
450-3390-01-03-10

Component	Material	Finish (-03)
Body	Brass	Gold over Nickel
Spring	Beryllium copper	Gold over Nickel
Insulator	Polyolefin plastic - black - supplied loose	

Recommended hook up wire size is 22 AWG (7 strands of 30AWG) copper wire PTFE insulated, .054 (1,37) over insulation. (not supplied)