


550-3711 R F Choke, moulded, axial, 180.0µH thru 390.0µH

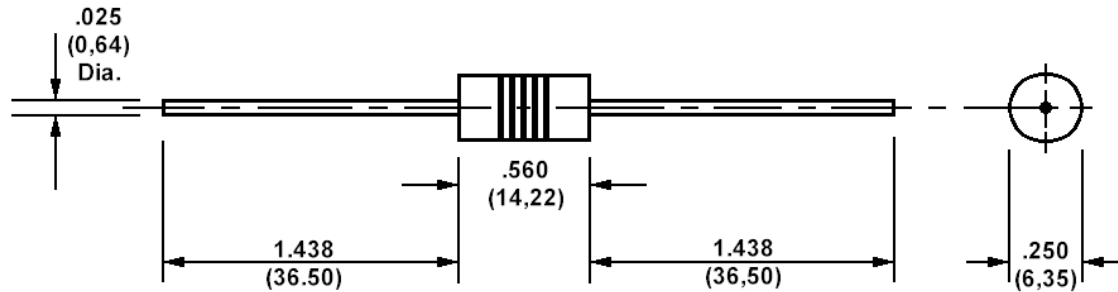

How to order code

550-3711-XX-YY-00

Basic Part No XX = Inductance identifier, YY = tolerance

| Basic Part No. | XX | Inductance | Colour Code | | | Q Min. | Test Freq. (MHz) | DCR Max. (Ω) | DC Max. (mA) | SRF Min. (MHz) |
|----------------|-----|------------|-------------|--------|-------|--------|------------------|--------------|--------------|----------------|
| | | | A | B | C | | | | | |
| 550-3711 | -01 | mH18 | Brown | Grey | Brown | 80 | .790 | 5.5 | 148 | 6.0 |
| | -02 | mH22 | Red | Red | Brown | 80 | .790 | 5.9 | 145 | 5.5 |
| | -03 | mH27 | Red | Violet | Brown | 80 | .790 | 6.6 | 138 | 5.1 |
| | -04 | mH33 | Orange | Orange | Brown | 75 | .790 | 7.8 | 122 | 4.2 |
| | -05 | mH39 | Orange | White | Brown | 75 | .790 | 8.7 | 118 | 3.9 |

| TOLERANCE (YY) | | |
|----------------|------|--------|
| -02 | ±10% | Silver |

Temperature range: -55°C to +125°C