


Cambion Electronics LTD

Castleton, Hope Valley, Derbyshire, S33 8WR, England Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290 Web: www.cambion.com Email: enquiries@cambion.com

Technical Data Sheet

703-8070 11 Way (9+2) Relay Base

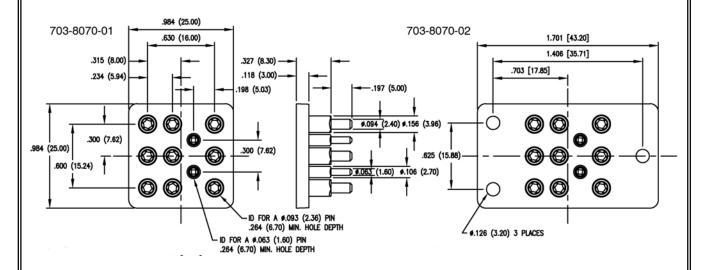

How to order code $\frac{703-8070-XX-03-10}{XX = mounting ear option}$ Basic Part No XX = mounting ear option

Two styles of base available to suit round pin format Relays, with and without mounting ears for optimum location possibilities. Relay base pins solder directly to PCB to maintain correct pitch for ease of Relay insertion.

Mounting Ear Option (XX)			
	(XX)	Option	
703-8070	-01	With out	
	-02	With mounting ears	

MATERIALS			
Component	Material	Finish	
Carrier	High Temperature Plastic		
Socket Bodies	Brass, EN 12164, CuZn36Pb3	Gold Plate 0.25µM, Nickel	
		1.25µM over Copper flash	
Socket Clips	Beryllium Copper, Alloy 172, HT.	Gold Plate 0.75µM, Nickel flash	

Other styles and configurations available please consult factory

RoHS Compliant