Dimensions in inches (mm)
See page 91 for Mounting Instructions

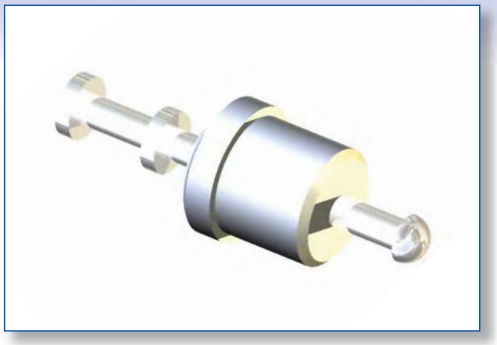

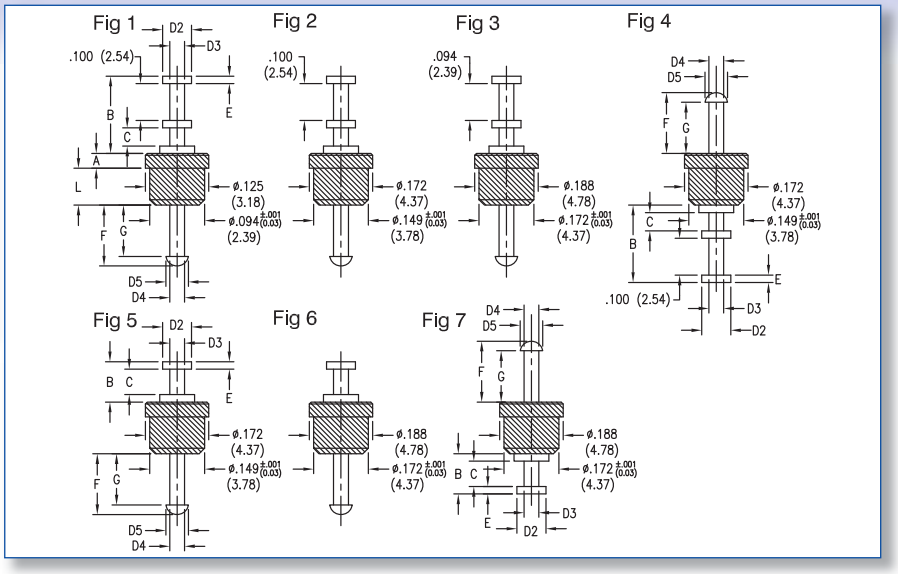

How to order code

571 - 4XXX - XX - XX - 19

- Basic Part No.
- Terminal Finish
- Insulator Colour

Material Code Table		
Component	Material	RoHS
Insulator	PTFE	✓
Terminal	Brass	✓

Finish Code Table		
Dash No.	Terminal Finish	RoHS
-01	Silver	✓
-04	Electro-Tin	✓
-05	Electro-Solder	X

Insulation Colour Code Table	
Dash No.	Colour
-19	White

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D2	D3	D4	D5	E	F	G	Mtg. Hole Diameter	Capacitance (pF)	Flashover VRMS at Sea Level
1	571-4154 -01	.060 (1.52)	.016 (0.40) only	.040 (1.02)	.210 (5.33)	.050 (1.27)	.080 (2.03)	.040 (1.02)	.035 (0.89)	.050 (1.27)	.020 (0.51)	.150 (3.81)	.125 (3.18)	.083 (2.11)	0.5	1500
	-02	.100 (2.54)	.031 (0.79) to .062 (1.57)												0.7	1500
2	571-4182 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.050 (1.27)	.080 (2.03)	.040 (1.02)	.040 (1.02)	.060 (1.52)	.020 (0.51)	.150 (3.81)	.120 (3.05)	.136 (3.45)	0.4	3000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)									.125 (3.18)	.095 (2.41)		0.4	3000
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)									.085 (2.16)	.055 (1.40)		0.4	3000
3	571-4250 -01	.200 (5.08)	.031 (0.79) to .162 (4.11)	.125 (3.18)	.281 (7.14)	.094 (2.39)	.125 (3.18)	.062 (1.57)	.050 (1.27)	.080 (2.03)	.031 (0.79)	.222 (5.64)	.182 (4.62)	.158 (4.01)	1.0	5500
	571-4241 -01	.212 (5.38)	.031 (0.79) to .172 (4.37)	.188 (4.78)	.250 (6.35)	.096 (2.44)	.094 (2.39)	.050 (1.27)	.050 (1.27)	.065 (1.65)	.020 (0.51)	.186 (4.72)	.154 (3.91)	.158 (4.01)	0.4	6000
4	571-4186 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.210 (5.33)	.050 (1.27)	.080 (2.03)	.040 (1.02)	.040 (1.02)	.060 (1.52)	.020 (0.51)	.150 (3.81)	.120 (3.05)	.136 (3.45)	0.4	3000
	-02	.125 (3.18)	.031 (0.79) to .085 (2.16)									.125 (3.18)	.095 (2.41)		0.4	3000
	-03	.165 (4.19)	.031 (0.79) to .125 (3.18)									.194 (4.93)	.164 (4.17)		0.4	3000
5	571-4179 -01	.100 (2.54)	.031 (0.79) to .062 (1.57)	.040 (1.02)	.125 (3.18)	.095 (2.41)	.080 (2.03)	.040 (1.02)	.040 (1.02)	.060 (1.52)	.020 (0.51)	.085 (2.16)	.055 (1.40)	.136 (3.45)	0.4	3000
6	571-4232 -01	.275 (6.99)	.031 (0.79) to .234 (5.94)	.250 (6.35)	.125 (3.18)	.063 (1.60)	.125 (3.18)	.050 (1.27)	.050 (1.27)	.065 (1.65)	.031 (0.79)	.215 (5.46)	.183 (4.65)	.158 (4.01)	0.45	7000
	571-4233 -01	.400 (10.16)	.031 (0.79) to .250 (6.35)	.375 (9.53)	.125 (3.18)	.063 (1.60)	.125 (3.18)	.050 (1.27)	.050 (1.27)	.065 (1.65)	.031 (0.79)	.215 (5.46)	.183 (4.65)	.158 (4.01)	0.45	9000
7	571-4234 -01	.212 (5.38)	.031 (0.79) to .172 (4.37)	.188 (4.78)	.125 (3.18)	.063 (1.60)	.125 (3.18)	.050 (1.27)	.050 (1.27)	.065 (1.65)	.031 (0.79)	.215 (5.46)	.183 (4.65)	.158 (4.01)	0.4	6000
	571-4235 -01	.275 (6.99)	.031 (0.79) to .234 (5.94)	.250 (6.35)	.125 (3.18)	.063 (1.60)	.125 (3.18)	.050 (1.27)	.050 (1.27)	.065 (1.65)	.031 (0.79)	.215 (5.46)	.183 (4.65)	.158 (4.01)	0.5	7000

Other colours available, consult factory.