**CAMBION®**

*Technical Data Sheet*

**Cambion Electronics LTD**
Castleton, Hope Valley, Derbyshire, S33 8WR, England
Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290
Web: www.cambion.com Email: enquiries@cambion.com

# 160-3653 Solder Terminal, Turreted

Recommended mounting hole .067 (1,70), #51 drill

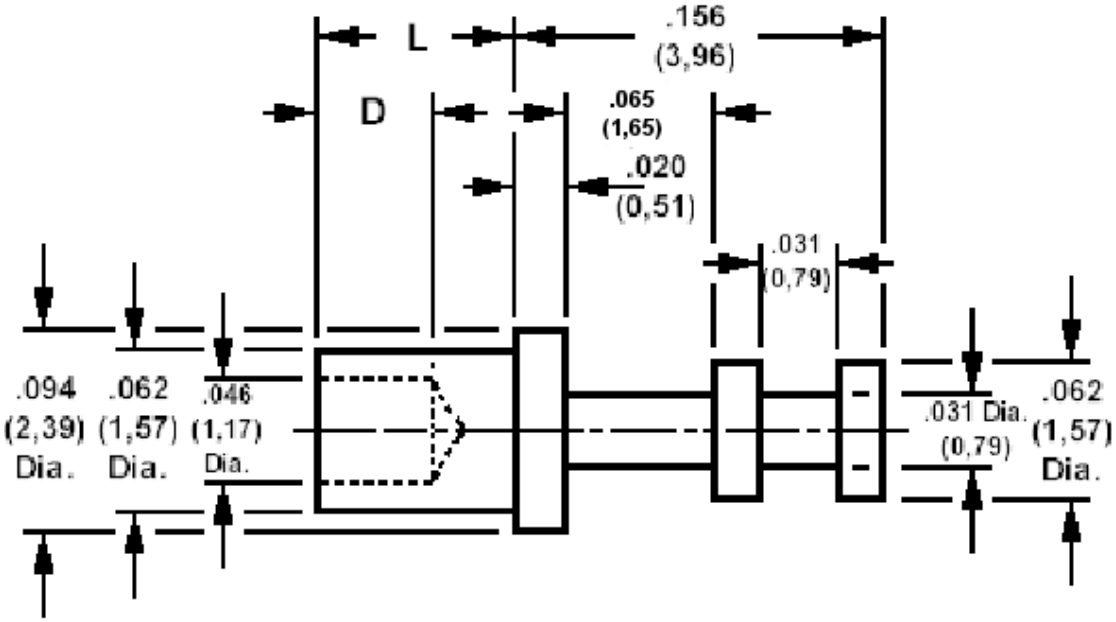


**How to order code**
**160-3653-XX-YY-00**
**Basic Part No XX = L dimension, YY = Plating Finish**

| DIMENSIONS (XX) | | | | |
|---|---|---|---|---|
| **Basic Part No** | **(XX)** | **L** | **Board Thickness** | **D** |
| 160-3653 | -11 | .037 (0,94) | .016 (0,41) | .025 (0,64) |
| | -01 | .053 (1,35) | .031 (0,79) | .045 (1,14) |
| | -02 | .084 (2,13) | .062 (1,57) | .045 (1,14) |
| | -03 | .115 (2,92) | .094 (2,39) | .045 (1,14) |
| | -04 | .147 (3,73) | .125 (3,18) | .045 (1,14) |

| | MATERIALS | | | | |
|---|---|---|---|---|---|
| **Component** | **Material** | **Finish (YY)** | | | |
| | | -01 | -03 | -04 | -05 |
| Terminal | Brass | Silver | Gold | Electro-Tin | Electro-Solder |
| RoHS | ✓ | ✓ | ✓ | ✓ | X |

| SWAGE TOOLING | |
|---|---|
| **Recommended Swaging Tools:-** | |
| Anvil | 435-6411-01-00-00 |
| Roll punch | 435-6611-01-00-00 |
| Flare punch | 435-6657-01-00-00 |

Copyright© Cambion® Tuesday, 07 June 2022 